

SL-F15A Stratlock™ Female Side Mount

INDUSTRY FIT:




SPECIFICATIONS:

STRATLOCK SL RANGE

The SL-F15A provides rapid installation of heavy panels into side-channel aluminium extrusion framework. Designed specifically for contract interior fit out applications, the SL-F15A is also suitable for superyacht deckhead panels. Female installs rapidly with a twist-lock function into the side channel, and can be screwed or riveted into its final position. Used with the SL-M15, the set provides 360° adjustment of panel before locking into place with a 15kg pull out load. Patent Pending.

Fits into channel dimensions: mouth: 7.5mm - 8.5mm, depth: min 7mm, wall thickness: 0.75mm - 1.2mm

SL-F15A 15kg



USE WITH:
SL-M15



NEW PRODUCT

MATERIAL:

White acetyl, rubber o-ring

MORE INFO:

Installation Guide SL-F15A
Clip Layout Guide TD-15



BENEFITS

- Strongest available mounting from Fastmount
- T-lock function for rapid installation into channel with screw or pop rivet
- Allows 360° adjustment of panel before locking into place
- No special tools required for installation
- Acoustic isolation between panel and frame
- Designed for aluminium extrusion
- 15kg pull out load
- 5mm standoff between frame and panel
- Adjustability along channel for easy spacing - no drilling required

APPLICATIONS

- Commercial interior fit out
- Architectural and marine applications
- Mounting heavier ceiling and wall panels
- Hotels, hospitals, retail
- Residential fitout
- Superyacht deckhead panels

INSTALLATION: Partially exploded through section showing typical installation method

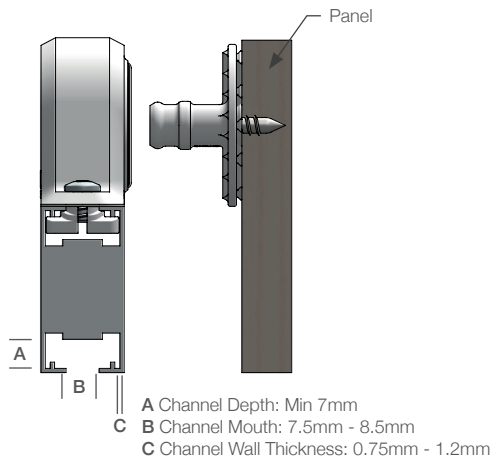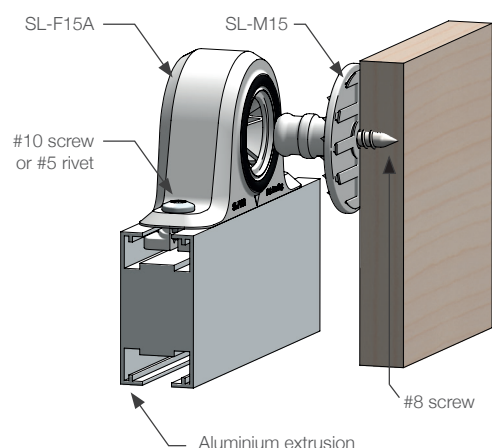

The Fastmount® multi-award winning system has revolutionized the mounting of panels. Panels can easily be removed and refitted in any sequence time after time. For further information or technical support contact: info@fastmount.com

www.fastmount.com

